

N67 220

N67 MNS M22

6 CYLINDERS IN LINE - DIESEL CYCLE

162 kW (220 HP) @ 2800 rpm (A1)

147 kW (200 HP) @ 2800 rpm (B)

132 kW (180 HP) @ 2800 rpm (C)

110 kW (150 HP) @ 2800 rpm (D)

Specifications

Thermodynamic cycle		Diesel 4 stroke
Air intake		TC
Arrangement		6L
Bore x Stroke	mm	104 x 132
Total displacement	l	6.7
Valves per cylinder	n.	2
Cooling system		liquid
Engine management		mechanical
Injection system		mechanical pump

Electrical system

Voltage	V	12
---------	---	----

Standard configuration

Flywheel housing	type	SAE 3
Flywheel size	inch	11.5
Turbocharger		Fixed Geometry (water cooled) Turbo (TC)
Heat exchanger		tube type
Water charge tank		included
Fuel filter	n.	1 - left side
Fuel prefilter		included (supplier loose)
Fuel pump		included
Oil filter	n.	1 - left side
Starting motor		12V - 3kW
Alternator		12V - 90A
Wiring harness		engine harness

Not included in the standard configuration


Battery - minimum capacity recommended		120 Ah
Battery - minimum cold cranking capacity recommended		900 A

FPT OFFERS THE WIDEST AVAILABILITY OF ENGINE BUILD OPTIONS TO CUSTOMER SPECIFIC REQUIREMENTS WITHIN THE ENGINE SUPPLY. TO FIND OUT MORE ABOUT THE CONFIGURATIONS AND ACCESSORIES WHICH ARE AVAILABLE, CONTACT THE FPT SALES NETWORK.

Rating type		A1	B	C	D
Maximum power [*]	kW(HP)	162 (220)	147 (200)	132 (180)	110 (150)
At speed	rpm	2800	2800	2800	2800
Maximum no load governed speed at max rating	rpm	-	-	-	-
Minimum idling speed	rpm	-	-	-	-
Mean piston speed at rated speed	m/s	-	-	-	-
BMEP at max power	kg/cm ²	-	-	-	-
Specific fuel consumption at full load (best value)	g/kWh @ rpm	213 @ 1500	213.8 @ 1800	218.7 @ 2400	211.2 @ 1800
Oil consumption at max rating	(% of fuel cons.)			-	
Minimum starting temperature without auxiliaries	°C			-15°	
Oil and oil filter maintenance interval for replacement	hours			600	

* **Net Power** at flywheel according to ISO 3046/1, after 50 hours running, Fuel Diesel EN 590. Power tolerance 5%.

Test conditions: ISO 3046/1, 25 °C air temperature, 100 kPa atmospheric pressure, 30 % relative humidity.

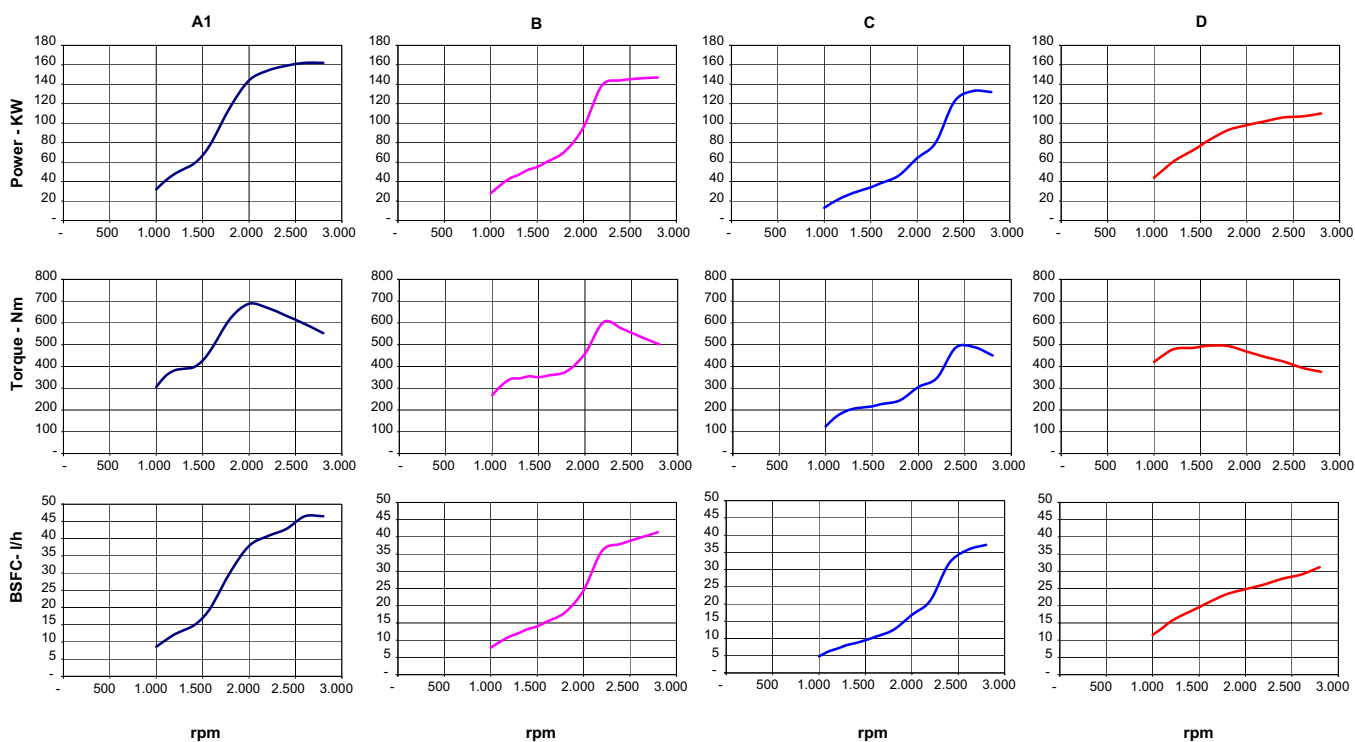


Fuel density = 840 g/l

A1 = High performance crafts.
Full throttle operation restricted within 10% of total use period.
Crushing speed at engine rpm < 90% of rated speed setting - Maximum usage 300 hours per year.

B = Light duty.
Full throttle operation restricted within 10% of total use period.
Crushing speed at engine rpm < 90% of rated speed setting - Maximum usage 1500 hours per year.

C = Medium duty.
Full throttle operation < 25% of use period.
Crushing speed at engine rpm < 90% of rated speed setting - Maximum usage 3000 hours per year.

D = Heavy duty.
Maximum rating utilisation up to 100% of use period, for unlimited hours per year.

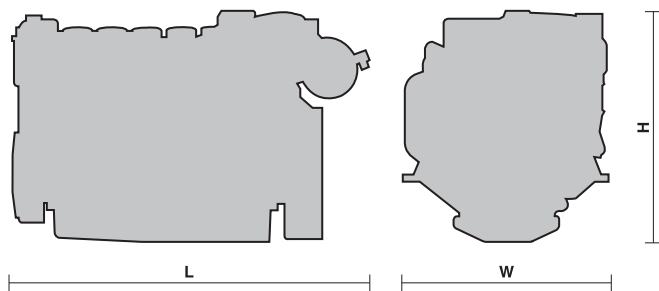

L = 1236 mm.
W = 780 mm.
H = 793 mm.
Dry weight (without marine gear) = 605 kg.

Publication P3D06N008E - 09.10
Specifications subject to change without notice.
Illustrations may include optional equipment.